

# Product Specifications



## DBXLH-6565A-VTM

DualPol® Dual Band Antenna, 824–960 MHz and 1710–2180 MHz, 65° horizontal beamwidth, RET compatible variable electrical tilt



- Two DualPol® antennas under one radome
- Interleaved dipole technology providing for attractive, low wind load mechanical package
- Each antenna is independently capable of field adjustable electrical tilt
- Fully compatible with Andrew Teletilt® remote control system

## CHARACTERISTICS

### General Specifications

Antenna Type	DualPol® dual band
Brand	DualPol®   Teletilt®
Operating Frequency Band	1710 – 2180 MHz   824 – 960 MHz

### Electrical Specifications

Frequency Band, MHz	824–896	870–960	1710–1880	1850–1990	1920–2180
Beamwidth, Horizontal, degrees	68	65	65	63	61
Gain, dBd	11.9	12.2	14.4	14.7	14.9
Gain, dBi	14.0	14.3	16.5	16.8	17.0
Beamwidth, Vertical, degrees	16.0	15.0	7.2	6.8	6.5
Beam Tilt, degrees	0–15	0–15	0–8	0–8	0–8
Upper Sidelobe Suppression (USLS), typical, dB	16	18	15	15	15
Front-to-Back Ratio at 180°, dB	25	25	28	28	27
Isolation, dB	25	30	30	30	30
VSWR   Return Loss, db	1.4:1   15.6	1.5:1   14.0	1.5:1   14.0	1.4:1   15.6	1.5:1   14.0
Intermodulation Products, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150
Input Power, maximum, watts	300	300	250	250	250
Polarization	±45°	±45°	±45°	±45°	±45°
Impedance, ohms	50	50	50	50	50
Lightning Protection	dc Ground	dc Ground	dc Ground	dc Ground	dc Ground

# Product Specifications

DBXLH-6565A-VTM



## Mechanical Specifications

Color	Light gray
Connector Interface	7-16 DIN Female
Connector Location	Bottom
Connector Quantity	4
Wind Loading, maximum	402.2 N @ 150 km/h 90.4 lbf @ 150 km/h
Wind Speed, maximum	201.0 km/h   124.9 mph

## Dimensions

Depth	132.0 mm   5.2 in
Length	1294.0 mm   50.9 in
Width	269.0 mm   10.6 in
Net Weight	14.2 kg   31.3 lb

## Remote Electrical Tilt (RET) Information

Model with Factory Installed AISG 1.1 Actuator	DBXLH-6565A-R2M
Model with Factory Installed AISG 2.0 Actuator	DBXLH-6565A-A2M
RET System	Teletilt®

## Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant by Exemption
China RoHS SJ/T 11364-2006	Above Maximum Concentration Value (MCV)



## INCLUDED PRODUCTS



### 600899A-2

Downtilt Mounting Kit for 4.5 in (114.3 mm) OD round members


# Product Specifications

DBXLH-6565A-VTM




## Horizontal Pattern


## Vertical Pattern

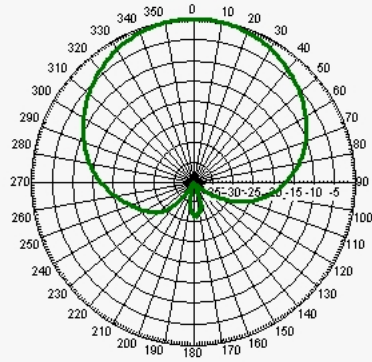


Freq: 850 MHz, Tilt: 0

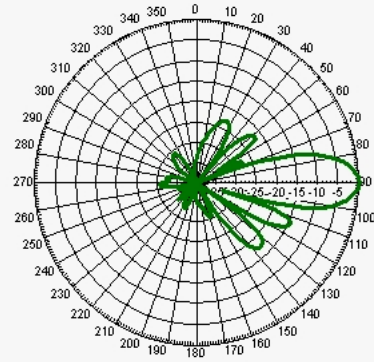


Freq: 850 MHz, Tilt: 0

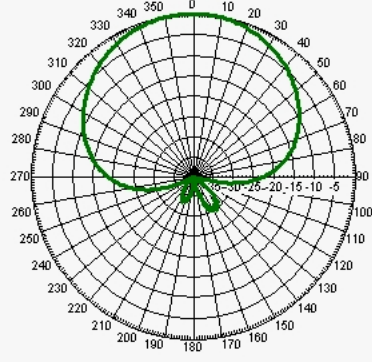


Freq: 940 MHz, Tilt: 0

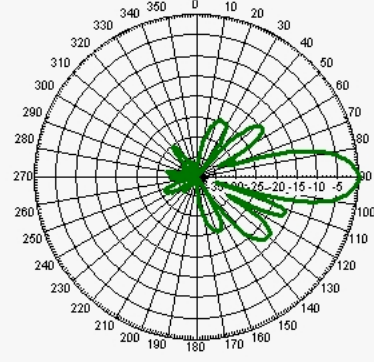

Freq: 940 MHz, Tilt: 0

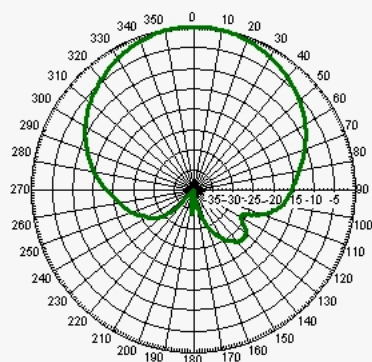

Freq: 1785 MHz, Tilt: 0

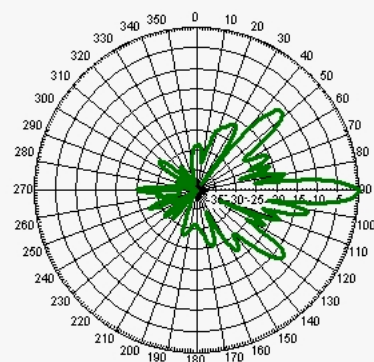

Freq: 1785 MHz, Tilt: 0

[www.commscope.com/andrew](http://www.commscope.com/andrew)

Join the Evolution


©2009 CommScope, Inc. All rights reserved.

All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope. All specifications are subject to change. See [www.commscope.com/andrew](http://www.commscope.com/andrew) for the most current information.


Page 3 of 6  
11/3/2009

# Product Specifications


DBXLH-6565A-VTM

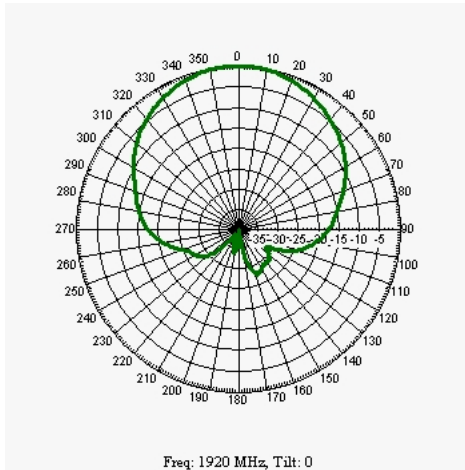


Freq: 1920 MHz, Tilt: 0

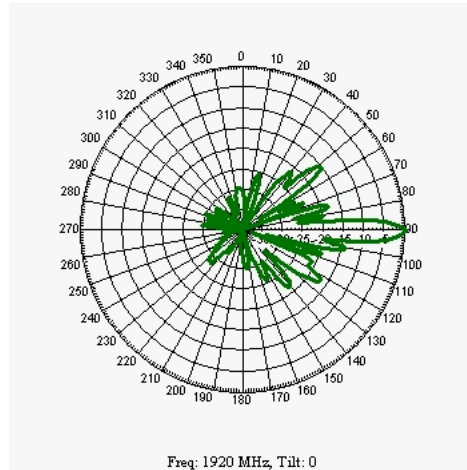

Freq: 1920 MHz, Tilt: 0

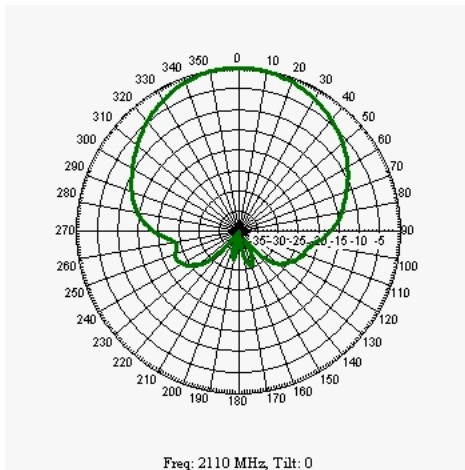

Freq: 2110 MHz, Tilt: 0

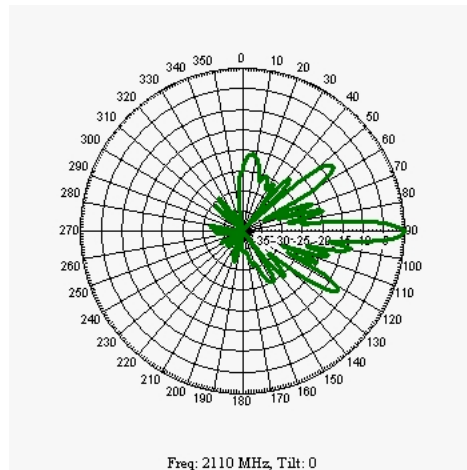

Freq: 2110 MHz, Tilt: 0

# Product Specifications



600899A-2

Downtilt Mounting Kit for 4.5 in (114.3 mm) OD round members



## CHARACTERISTICS

### General Specifications

Mount Type	Downtilt mounts
Includes	Brackets   Hardware
Package Quantity	1

### Mechanical Specifications

Color	Silver
Material Type	Stainless steel

### Dimensions

Compatible Diameter, maximum	114.3 mm   4.5 in
Compatible Diameter, minimum	61.0 mm   2.4 in
Net Weight	4.1 kg   9.0 lb

### Packed Dimensions

Height	76.2 mm   3.0 in
Length	381.0 mm   15.0 in
Shipping Weight	4.31 kg   9.50 lb
Width	254.0 mm   10.0 in

### Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant
China RoHS SJ/T 11364-2006	Below Maximum Concentration Value (MCV)

[www.commscope.com/andrew](http://www.commscope.com/andrew)

Join the Evolution

©2009 CommScope, Inc. All rights reserved.

All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope. All specifications are subject to change. See [www.commscope.com/andrew](http://www.commscope.com/andrew) for the most current information.

Page 5 of 6  
11/3/2009

# Product Specifications

600899A-2

